# **OVERLAY**



The Overlay Bi-Fold is a bi-folding door track system designed for wardrobe doors, large cupboard doors, pantries, closets and concealed rooms in confined areas such as laundries.

A built-in quick-release mechanism assists with troublefree fitting aswell as allowing the doors to easily be opened out for access to internal adjustable shelves.

#### **FEATURES**

Track: Aluminium "J" track with built-in Guide channel

- top mount

Pivot Set: Jamb fixed concealed hinges

Components suit both LH and RH openings
Key features: Adjustable cabinet hinges - chrome plated

Hinges: Door mounted wheel assembly with quickpoor Guide: release guide roller

Optional: Optional bottom rolling guide and aluminium


guide angle



### **TRACK VIEW**



## **GUIDE VIEW**



#### **TECH SPECS**

Included Feature Optional Extra	
System Type	Bi-Folding
Max. Weight Door/Panel	25kg
Door/Panel width (mm)	Up to 500
Door Thickness (mm) min.	16-25
Track Length (mm)	3000mm
Suits No. of doors	2 Panels
Track Type	Aluminium open "J" white/mill

0
0
0
0
0
0
•

## **OVERLAY BIFOLD**

# **COMPONENTS & REPLACEMENT PARTS**



TT39600: Double Wheel Assembly with hinges





TT39032: Top Track 3000mm Clear Anod.

Concealed Hinge with

TT38700:



TT39036: Top Track 3000mm White

# **OPTIONAL EXTRAS**





TT39800: Double Roller Guide with hinge



TT41332: Bottom Guide Angle 3000mm Clear Anod.

## **ARCHITECTURAL DRAWINGS**

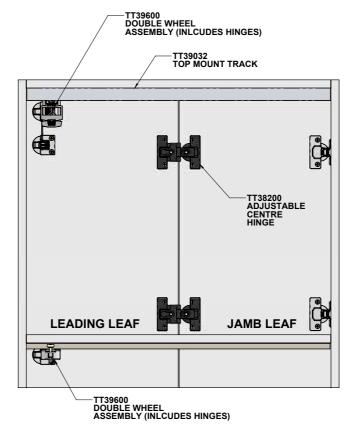

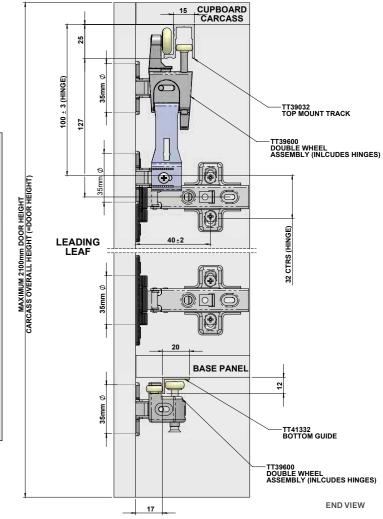

BACK VIEW

42