

A simple glass door system using free-running ball bearings inside the bottom track. Designed for simple installation and ideal for cabinets, vanities and small internal windows.


For 2-door application, but can also be used in multiples of 2 by running multiple tracks next to each other.



**TRACK VIEW**



**GUIDE VIEW**

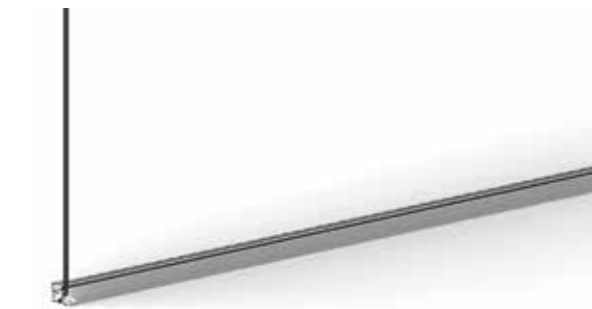

**TECH SPECS**

- Included Feature
- Optional Extra

System Type	Multi-Sliding
Max. Weight Door/Panel	22kg
Door/Panel width (mm)	Up to 1000
Door Thickness (mm) min.	6-6.38
Track Length (mm)	4500mm
Suits No. of doors	2
Track Type	Aluminium - anodised/ mill finish

External door	
Internal door	
Wardrobe doors	
Cupboard doors	○
Glass Cabinet doors	○
Wall mounted track	
Top mounted track	
Floor fixed track	○
Top guide	○
End stop	
Soft-close	
Pelmet	
No. Balls	92 balls per metre per channel
Max Door Size (m <sup>2</sup> )	1.40
Max Door Height (mm)	1220


**BALL BEARING**  
COMPONENTS & REPLACEMENT PARTS

	TT02011: Aluminium Double Headguide with Pile - 4500mm - Mill		TT02012: Aluminium Double Headguide with Pile - 4500mm - Clear Anod.		TT07400: Nylon Ball
	TT07700: Stainless Ball		TT41511: Aluminium Double Track - 4500mm - Mill		TT41512: Aluminium Double Track - 4500mm - Clear Anod.

**OPTIONAL EXTRAS**

	TT07100: Finger Pull Assembly for 5-6mm Glass
--	--

**ARCHITECTURAL DRAWINGS**

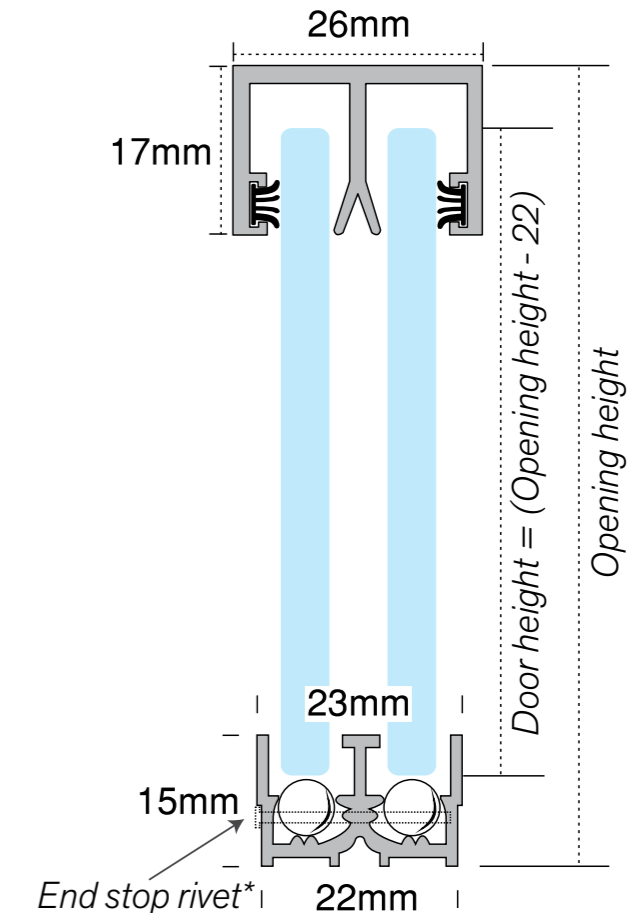

**GLASS PREPARATION DETAILS:**

Cowdroy recommends all glass have polished edges and rounded corners to 10mm.

*\*End stop rivet is only required when doors have an open end(s).  
Double track for 6mm float & 6.38mm laminate glass panels*

END VIEW