

This system features a 316 Stainless steel housing with a manganese bronze tyre for increased wheel longevity and a 200kg weight capacity. With an 8mm, end height adjustment mechanism, this sheave can be adjusted once the door is in place. Suitable for external use, particularly patio doors and other heavy duty applications.

FEATURES

- Track: Slimline manganese bronze bottom track
- Wheel assembly: Stainless steel wheel assembly with manganese bronze tyre
- Key features: 8mm, end height adjustment
- Door Guide: Top mounted guide channel and roller guide
- Optional: Alternate guide options available



GUIDE VIEW



TRACK VIEW



TECH SPECS

- Included Feature
- Optional Extra

System Type	Sliding
Max. Weight Door/Panel	200kg
Door/Panel width (mm)	Up to 3000
Door Thickness (mm) min.	35-50
Track Length (mm)	6000mm
Suits No. of doors	Single/Multiple
Track Type	Brass/bronze mill finish

External door	○
Internal door	○
Wardrobe doors	
Cupboard doors	
Glass Cabinet doors	
Wall mounted track	
Top mounted track	
Floor fixed track	○
Top hung wheel	
Bottom rolling wheel	○
Door side fix	
End pivoting	
Centre pivoting	
Bottom guide	
Top guide	○
End stop	
Soft-close	
Pelmet	

TIMBERLINE COMPONENTS & REPLACEMENT PARTS


Other track sizes may be available to order

	TT65700: S/Steel Wheel Assembly w/ Bronze Tyre		TT61250: Manganese Bronze Track 6000mm		TT61251: Manganese Bronze Track 6000mm Pre-Drilled
	AW21600: Roller Guide - Stainless steel		TT84762: Aluminium Guide Channel 6.5m Clear Anod.		TT84618: PVC Guide Channel Insert 6.5m Black

OPTIONAL EXTRAS

	TT61800: Brass Screw 6G x 16mm CSK PH - bag of 100		TT61900: Brass Screw 6G x 19mm CSK PH - bag of 100		TT65408: Access Hole Plug for 8mm hole Black
	TT65832: Pelmet Guide 6000mm Clear Anod.		TT65834: Pelmet Guide 6000mm Bronze Anod.		TT65900: Nylon Guide Block for TT658 - Black
	TT20852: Alum. T Guide 6000mm Clear Anod.		TT20872: Alum. T Guide 6000mm Pre-Drilled Clear Anod.		TT66900: Nylon Guide Block for TT208 - Black
	TT61742: Flat Bar Guide 32x3mm 4000mm Clear Anod.		TT67412: Door Collector Seal w/pile 3000mm Clear Anod.		TT67414: Door Collector Seal w/pile 3000mm Bronze Anod.

ARCHITECTURAL DRAWINGS

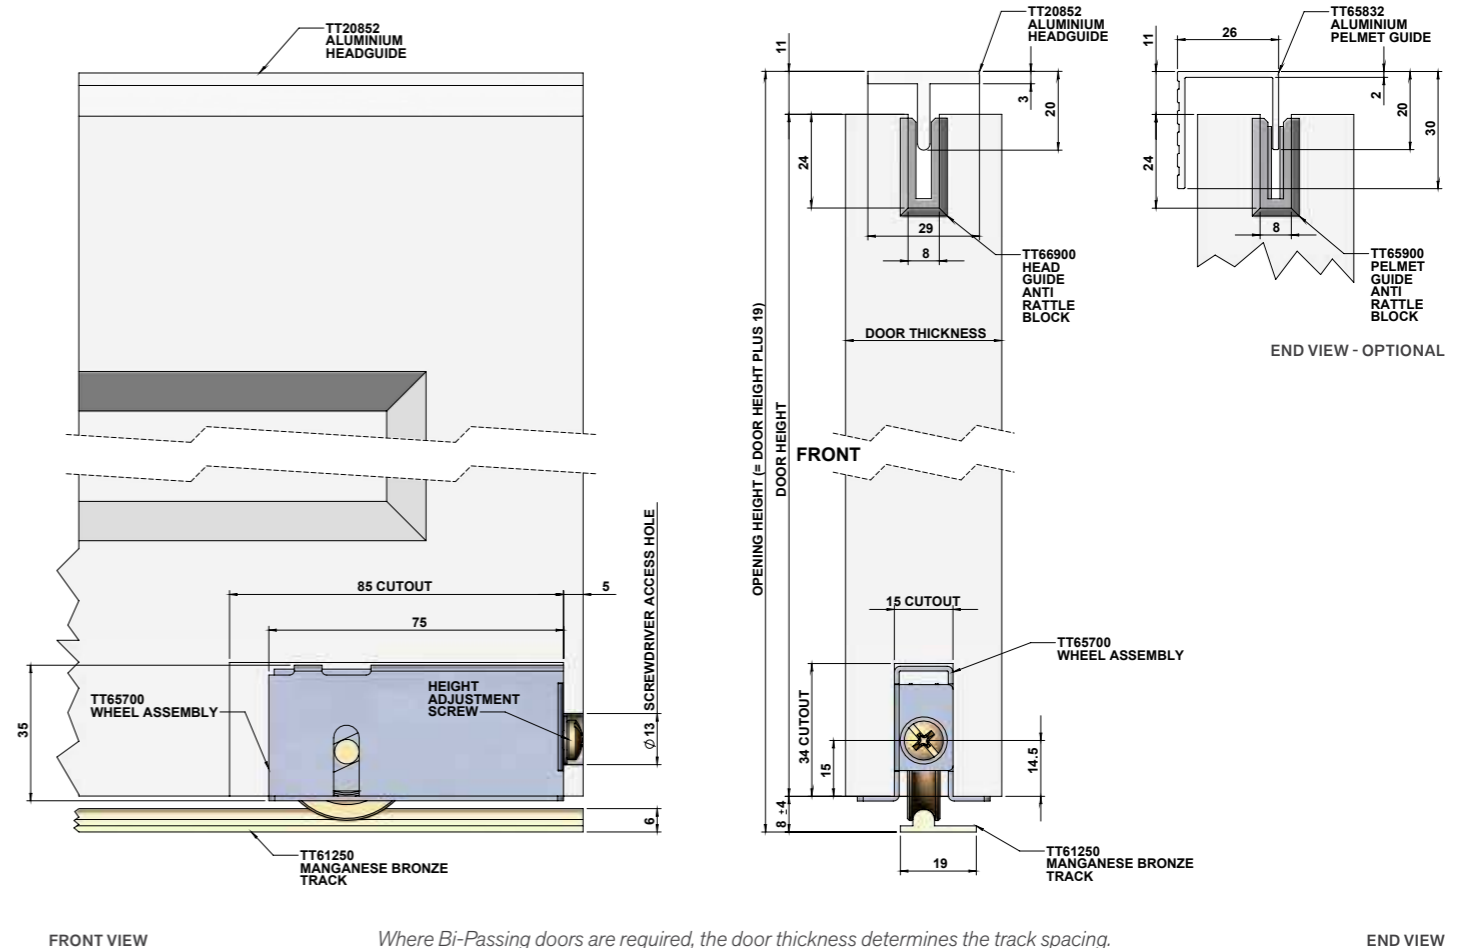

FRONT VIEW

Where Bi-Passing doors are required, the door thickness determines the track spacing.

END VIEW