TRIUMPH

SLIDING DOOR TRACK SYSTEM - 80kg MAXIMUM DOOR LOAD

WALL MOUNT APPLICATION

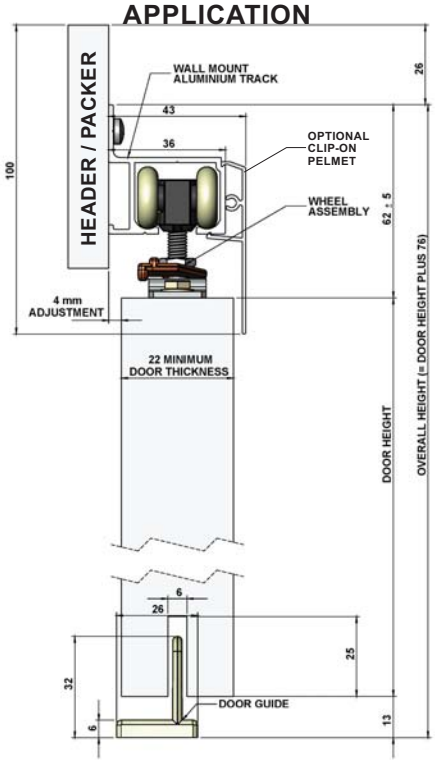

TOP MOUNT APPLICATION

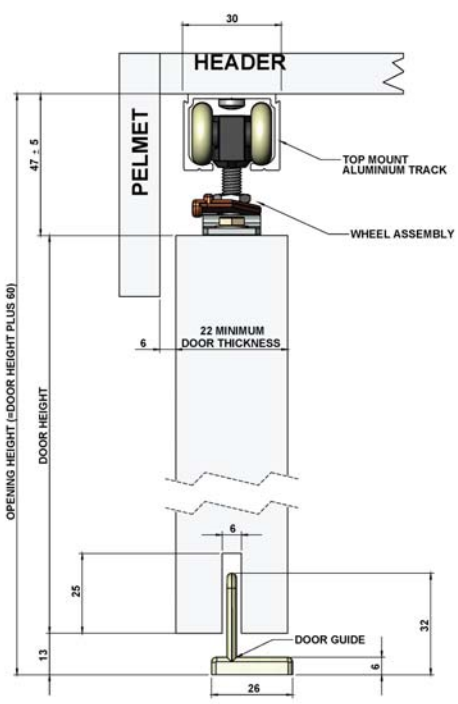

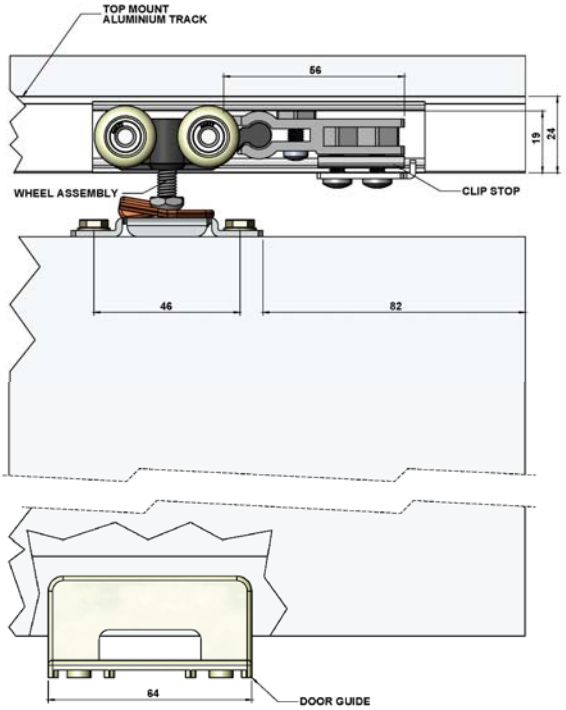

1. Setting up your wall: For Wall Mount Applications only: If skirting boards and / or architraves are fitted, a packing piece of timber (or suitable material) being the same thickness strong enough to support the weight of the door/s with a suitable width for the Track and suitable length will be needed to be used to mount the Track to the wall.
2. Overall Height - Wall Mount Applications: from floor to top of Track is Door height plus 76 mm.
   Overall Height - Top Mount Applications: from floor to top of Track is door height plus 60 mm
   Using the Quick Release swing arm, release and remove Hanger Brackets from Wheel Assemblies. Place all Wheel Assemblies (without Hanger Brackets) and Clip-Stops into the Track, ensuring the Clip-Stops are to the outside and facing the correct direction and that the wheel assemblies correctly engage with the Clip-Stops. Fix Track so it is parallel to floor, ensuring travel is suited to the required opening, using #8 x 19 mm pan head screws.
3. A groove of 25 mm deep by 6 mm wide is required in the bottom of the door to allow for Door Guide. (Alternatively, purchase option Door Guides P20700 or P21300 for use without grooving the door).
4. Fix Hanger Brackets to top of door, 82 mm in from each end, 17 mm in from rear face, using #10 x 25 mm hex head screws. Ensure the Quick-Release swing arm is to the outside.
5. Wipe free any dirt or filings etc from Track, lift door onto Track by hooking the Hanger Bracket onto the Wheel Assembly hanger pins and clip the Quick-Release arm back into place to secure the door.
6. Adjust height of door using the Adjustment Nut on the hanger pin using an 8 mm Adjustment Spanner (TT346), so that door clears floor by a minimum of 8 mm (for door guide).
7. Roll door into desired closing position, ensuring engagement of the Wheel Assembly with the Clip-Stop and tighten up Clip-Stop clamp onto Track. Repeat for the desired open position.
8. Roll door in closed position and place Door Guide into the underside door groove at trailing end, allowing it to protrude half way out past the door edge and fix Door Guide using one #4 x 16 mm CSK screw. Roll door into open position where second fixing hole in Door Guide will be exposed, turn guide to take up any looseness and fix second #4 x 16 mm CSK screw.
9. Check that door rolls freely on Track and that Clip-Stops engage at desired positions. Once any final adjustments as necessary are made, ensure all fittings are secure and fit end caps (where supplied).
10. If an optional pelmet has been purchased, clip onto the track and fit Pelmet End Caps to each end.

TRIUMPH

SLIDING DOOR TRACK SYSTEM - 80kg MAXIMUM DOOR LOAD

PACK CONTENTS

Item Description	Available Colour	Top Mount 915mm door	Wall Mount 915mm door
Track (Top mount) (Wall mount)  	Clear Anodised	1 x 1830mm	1 x 1830mm
Quick-Release Wheel Assembly	Black / Zinc	2	2
Clip-Stop Assembly	Black / Zinc	2	2
Nylon Door Guide	White	1	1
End Caps	Grey	2	2
Adjustment Spanner	Zinc	1	1
#10 x 25mm Hex Streaker Screw (for wheel assemblies) 	Zinc plated	4	4
#8 x 19mm Pan Head Phillips Screw (for track)	Zinc plated	12	12
#4 x 16mm CSK Head Phillips Screw (for door guides)	Zinc plated	2	2

ALTERNATIVE DOOR GUIDES: (Sold seperately)



P20900 Nylon Guide
with wall fix bracket

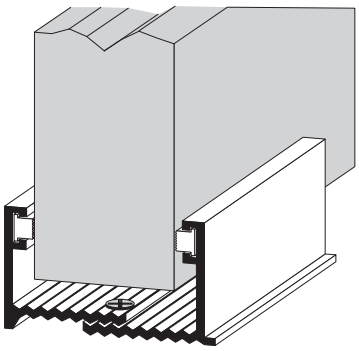

P20700 Aluminium Guide
floor fix - no groove required

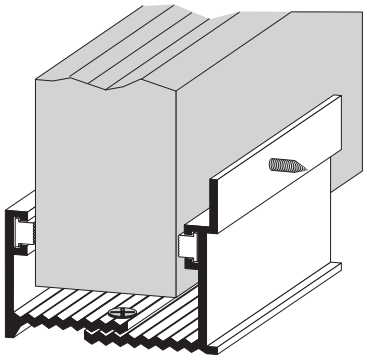

P21300 Aluminium Guide
wall fix - no groove required

SPARE PARTS & OPTIONAL ACCESSORIES:

S337CS Replacement Wheel Assembly Pk 2
S20800 Replacement Door Guide Pk 1
TT32700 Replacement Clip-Stop Door Stop
TT314 Clip-On Aluminium Pelmet 5.5m - Clear Anodised & White
TT315 Pelmet End Cap - Grey or White

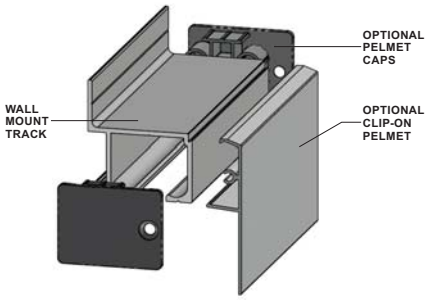

TRIUMPH

SLIDING DOOR TRACK SYSTEM - 80kg MAXIMUM DOOR LOAD

WALL MOUNT APPLICATION

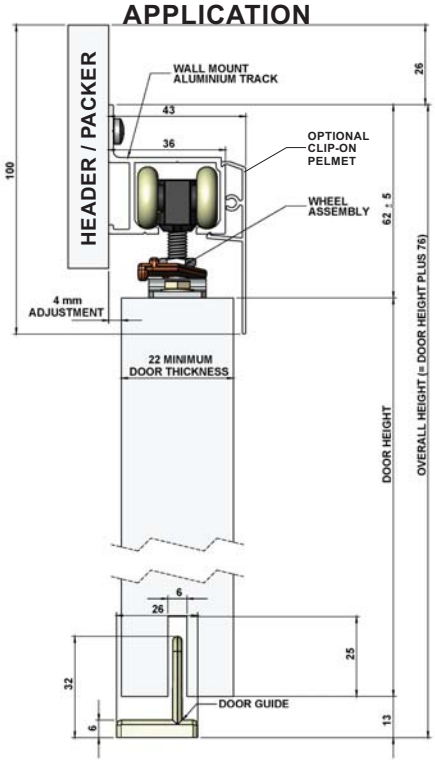

TOP MOUNT APPLICATION

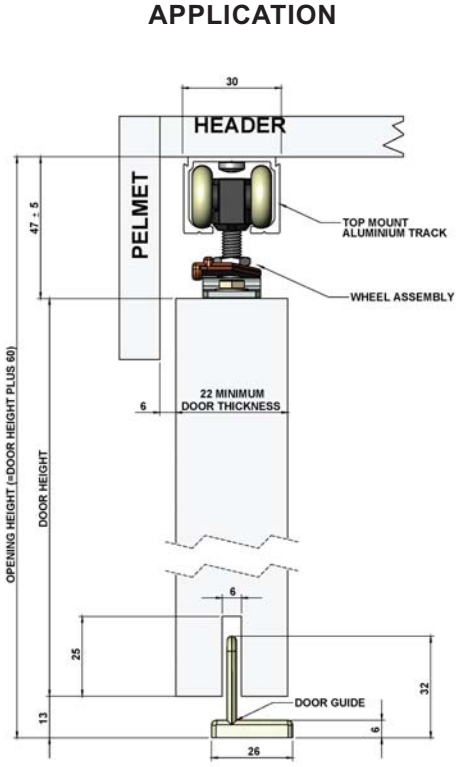

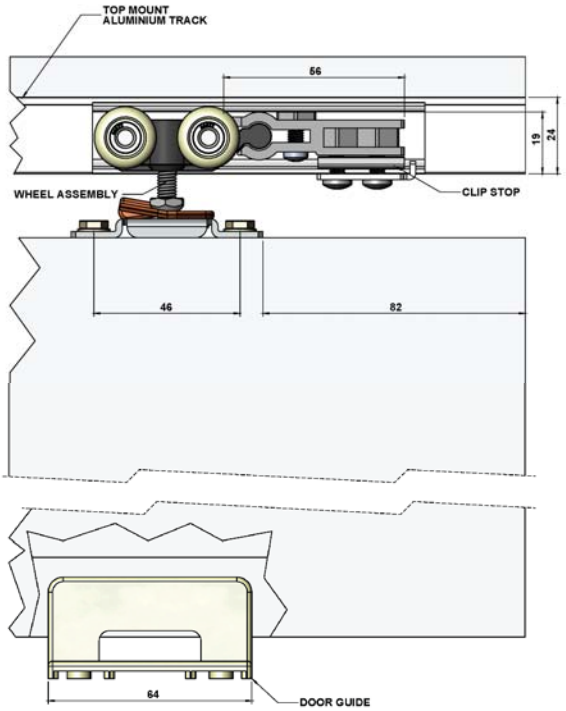

1. Setting up your wall: For Wall Mount Applications only: If skirting boards and / or architraves are fitted, a packing piece of timber (or suitable material) being the same thickness strong enough to support the weight of the door/s with a suitable width for the Track and suitable length will be needed to be used to mount the Track to the wall.
2. Overall Height - Wall Mount Applications: from floor to top of Track is Door height plus 76 mm.
   Overall Height - Top Mount Applications: from floor to top of Track is door height plus 60 mm
   Using the Quick Release swing arm, release and remove Hanger Brackets from Wheel Assemblies. Place all Wheel Assemblies (without Hanger Brackets) and Clip-Stops into the Track, ensuring the Clip-Stops are to the outside and facing the correct direction and that the wheel assemblies correctly engage with the Clip-Stops. Fix Track so it is parallel to floor, ensuring travel is suited to the required opening, using #8 x 19 mm pan head screws.
3. A groove of 25 mm deep by 6 mm wide is required in the bottom of the door to allow for Door Guide. (Alternatively, purchase option Door Guides P20700 or P21300 for use without grooving the door).
4. Fix Hanger Brackets to top of door, 82 mm in from each end, 17 mm in from rear face, using #10 x 25 mm hex head screws. Ensure the Quick-Release swing arm is to the outside.
5. Wipe free any dirt or filings etc from Track, lift door onto Track by hooking the Hanger Bracket onto the Wheel Assembly hanger pins and clip the Quick-Release arm back into place to secure the door.
6. Adjust height of door using the Adjustment Nut on the hanger pin using an 8 mm Adjustment Spanner (TT346), so that door clears floor by a minimum of 8 mm (for door guide).
7. Roll door into desired closing position, ensuring engagement of the Wheel Assembly with the Clip-Stop and tighten up Clip-Stop clamp onto Track. Repeat for the desired open position.
8. Roll door in closed position and place Door Guide into the underside door groove at trailing end, allowing it to protrude half way out past the door edge and fix Door Guide using one #4 x 16 mm CSK screw. Roll door into open position where second fixing hole in Door Guide will be exposed, turn guide to take up any looseness and fix second #4 x 16 mm CSK screw.
9. Check that door rolls freely on Track and that Clip-Stops engage at desired positions. Once any final adjustments as necessary are made, ensure all fittings are secure and fit end caps (where supplied).
10. If an optional pelmet has been purchased, clip onto the track and fit Pelmet End Caps to each end.

TRIUMPH

SLIDING DOOR TRACK SYSTEM - 80kg MAXIMUM DOOR LOAD

PACK CONTENTS

Item Description	Finish	1 x Soft Close (#P355SC)	2 x Soft Close (#P356SC)
Quick-Release Wheel Assembly	Black / Zinc	2	2
Clip-Stop Assembly	Black / Zinc	1	
Nylon Door Guide	White	1	1
Soft Close Kit 	Black / Zinc	1	2
Adjustment Spanner	Zinc	1	1
#10 x 25mm Hex Streaker Screw (for wheel assemblies) 	Zinc plated	4	4
#4 x 16mm CSK Head Phillips Screw (for door guides)	Zinc plated	2	2

ALTERNATIVE DOOR GUIDES: (Sold seperately)



P20900 Nylon Guide
with wall fix bracket

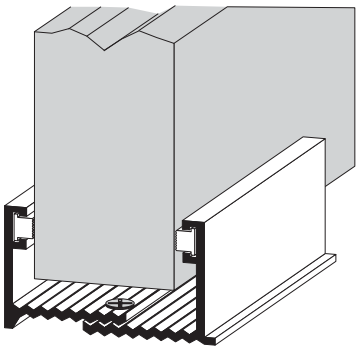

P20700 Aluminium Guide
floor fix - no groove required

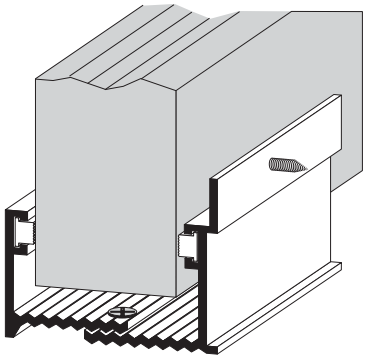

P21300 Aluminium Guide
wall fix - no groove required

SPARE PARTS & OPTIONAL ACCESSORIES:

S337CS Replacement Wheel Assembly Pk 2
S20800 Replacement Door Guide Pk 1
TT32700 Replacement Clip-Stop Door Stop
TT314 Clip-On Aluminium Pelmet 5.5m - Clear Anodised & White
TT316 Pelmet End Cap - Grey or White

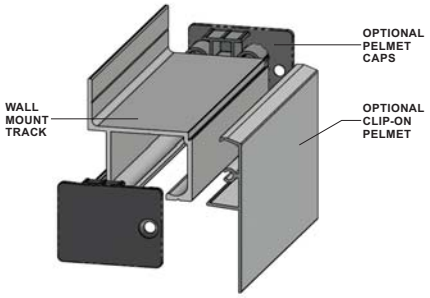

TRIUMPH SOFT CLOSE KIT

FOR TRIUMPH SLIDING DOOR TRACK SYSTEM - 60kg MAXIMUM DOOR LOAD

1. Separate the wheel assembly and hanger plate

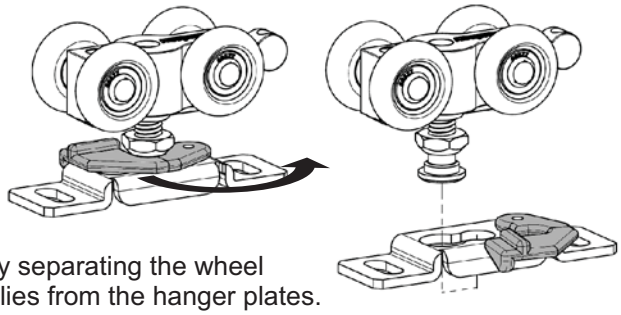

Begin by separating the wheel assemblies from the hanger plates. This is done by releasing the “quick-release” lever, moving and lifting the assembly out of the plate.

2. Fit wheel assembly plates to the door

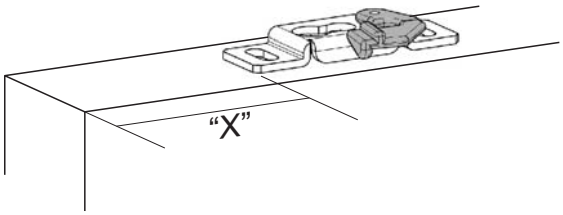

Fix the hanger plates to the door at a desired distance “X” from the end of the door to the edge of the plate. Repeat for both ends.

3. Fit Soft Close unit to wheel assembly

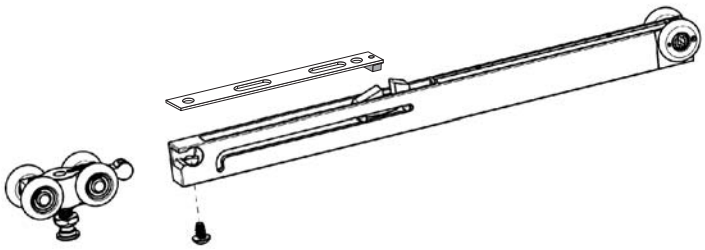

Fit the Soft Close unit to the wheel assembly by inserting the hanger arm into the engagement slot and fix using the Retaining Screw (a). Repeat for both ends if used.

4. Fit your wheel assemblies into the track

Top-fixed track

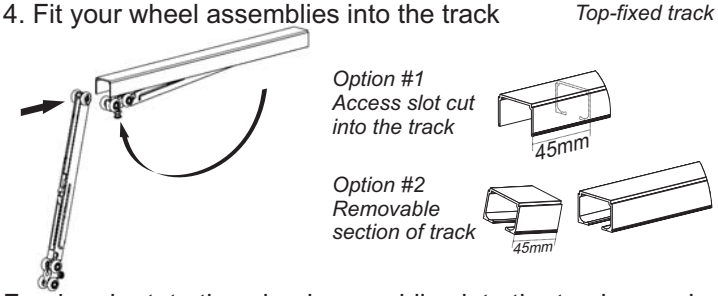

Feed and rotate the wheel assemblies into the track ensuring the 4-wheel carriage is closest to each end.
For top-fixed track between jambs an access slot or 45mm removable section of track may be required for fitting.

5. Hang your door

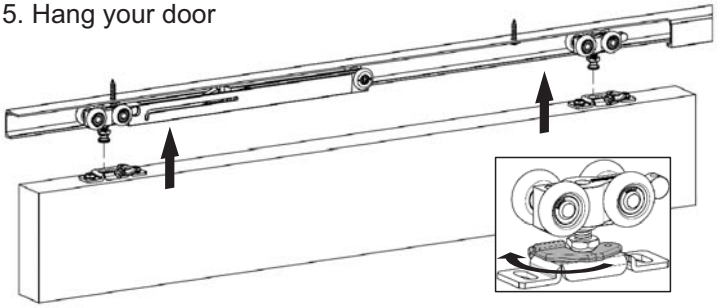

Lift your door up to the wheel assemblies and re-attach the hanger plates to the wheel assemblies. Re-engage the “quick-release” arm until it clicks into place.

6. Catch fixing options

NOTE: A hole size between 4.5mm to 5.0mm is recommended

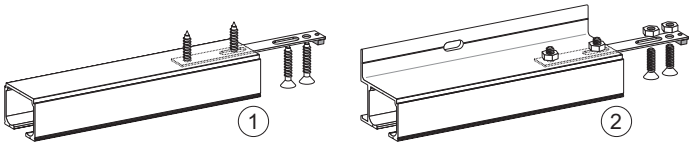

1. Use the Catch Screws (b) for top fix tracks
   or
2. Use the Catch Screw & Nut (c) for wall fix tracks

7. Fit the Soft Close Catch

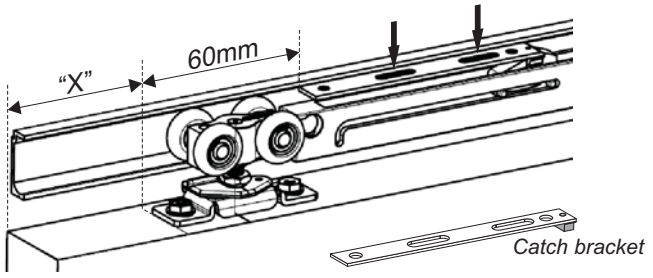

Mark your door’s closed position, then at a distance of **“X” +60mm** to the edge of the catch bracket, fix the bracket in place using the elongated **centre holes only**.

8. Test and align your catch

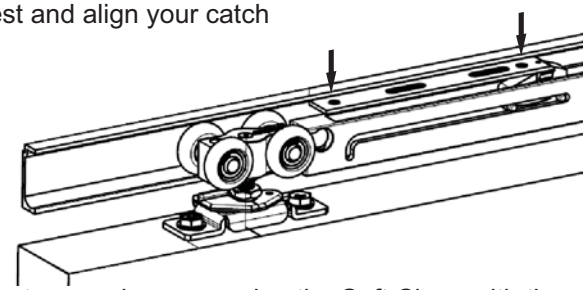

Operate your door, engaging the Soft Close with the catch and assess for desired closing point. Adjust if required by loosening the catch screws and sliding the catch as desired. Once satisfied fix the catch in place via the outside holes.

TRIUMPH SOFT CLOSE KIT

FOR TRIUMPH SLIDING DOOR TRACK SYSTEM - 60kg MAXIMUM DOOR LOAD

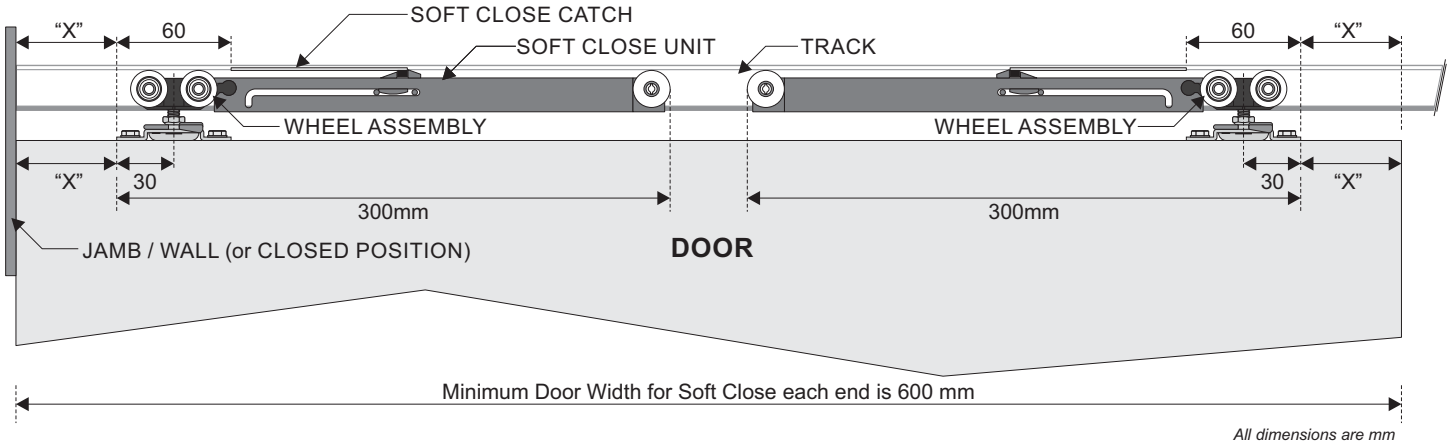

All dimensions are mm

PACK CONTENTS

Item Description	Qty
Soft Close Unit 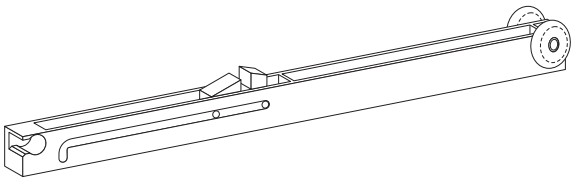	1
Soft Close Retaining Screw (a) M2 x 4mm	1
Soft Close Catch 	1
Catch Screw (b) 4 x 1/2" CSK (for top fix tracks) 	4
Catch Screw (c) M4 x 10mm with Nut M4 Nyloc (for wall fix tracks) 	4

EXISTING PARTS - COWDROY TRIUMPH SLIDING DOOR SYSTEM



Wheel Assembly
with attachment arm

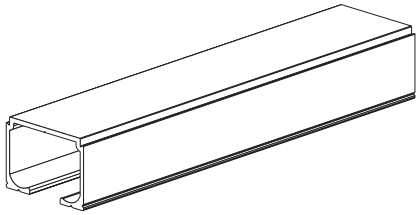

Triumph Track
(top fix)

or

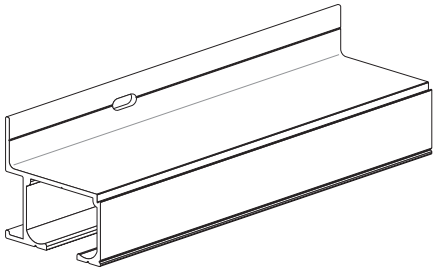

Triumph Track
(wall fix)