


TRIUMPH SOFT CLOSE KIT


FOR TRIUMPH SLIDING DOOR TRACK SYSTEM - 60kg MAXIMUM DOOR LOAD

1. Separate the wheel assembly and hanger plate

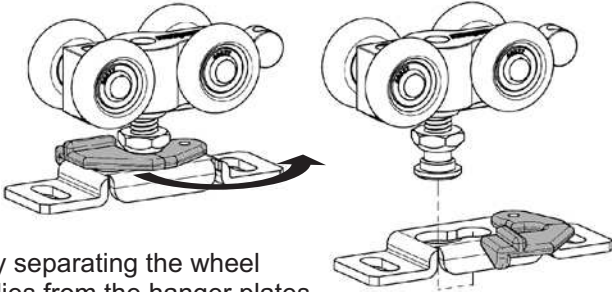


Begin by separating the wheel assemblies from the hanger plates. This is done by releasing the "quick-release" lever, moving and lifting the assembly out of the plate.

2. Fit wheel assembly plates to the door

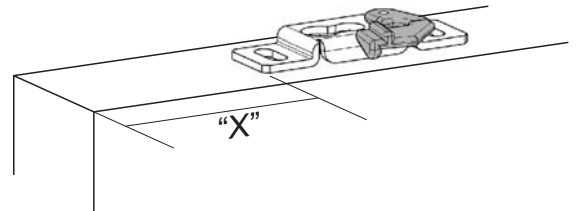


Fix the hanger plates to the door at a desired distance "X" from the end of the door to the edge of the plate. Repeat for both ends.

3. Fit Soft Close unit to wheel assembly

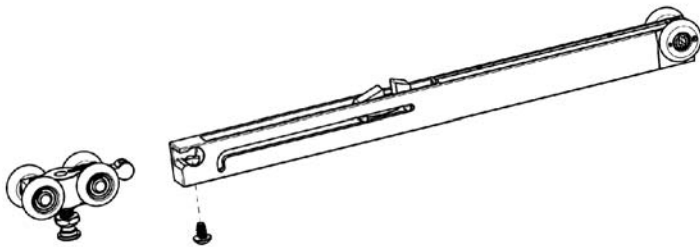


Fit the Soft Close unit to the wheel assembly by inserting the hanger arm into the engagement slot and fix using the Retaining Screw (a). Repeat for both ends if used.

4. Fit your wheel assemblies into the track Top-fixed track

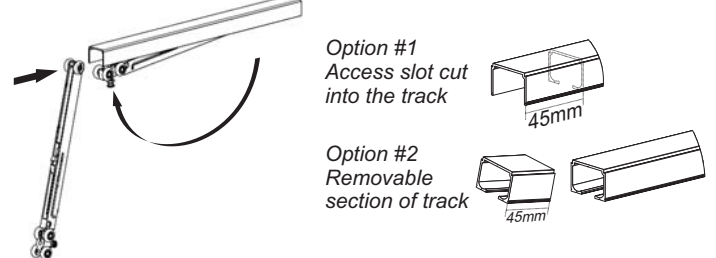

Feed and rotate the wheel assemblies into the track ensuring the 4-wheel carriage is closest to each end. For top-fixed track between jambs an access slot or 45mm removable section of track may be required for fitting.


5. Hang your door

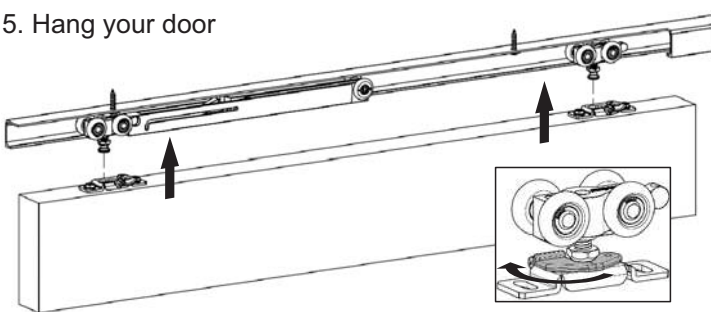

Lift your door up to the wheel assemblies and re-attach the hanger plates to the wheel assemblies. Re-engage the "quick-release" arm until it clicks into place.


6. Catch fixing options

NOTE: A hole size between 4.5mm to 5.0mm is recommended

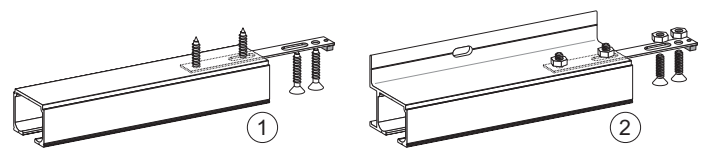


1. Use the Catch Screws (b) for top fix tracks or
2. Use the Catch Screw & Nut (c) for wall fix tracks

7. Fit the Soft Close Catch

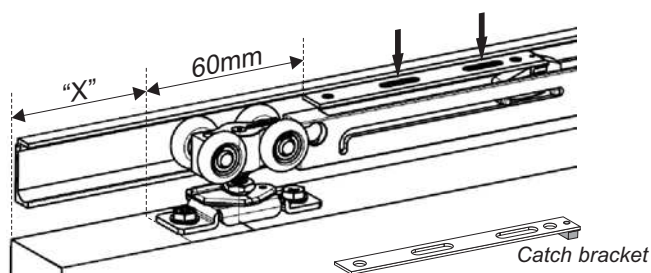

Mark your door's closed position, then at a distance of "X" +60mm to the edge of the catch bracket, fix the bracket in place using the elongated **centre holes only**.


8. Test and align your catch

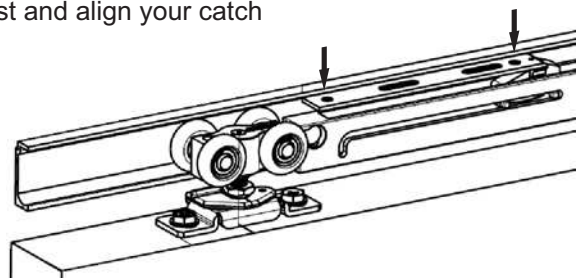

Operate your door, engaging the Soft Close with the catch and assess for desired closing point. Adjust if required by loosening the catch screws and sliding the catch as desired. Once satisfied fix the catch in place via the outside holes.

TRIUMPH SOFT CLOSE KIT

FOR TRIUMPH SLIDING DOOR TRACK SYSTEM - 60kg MAXIMUM DOOR LOAD

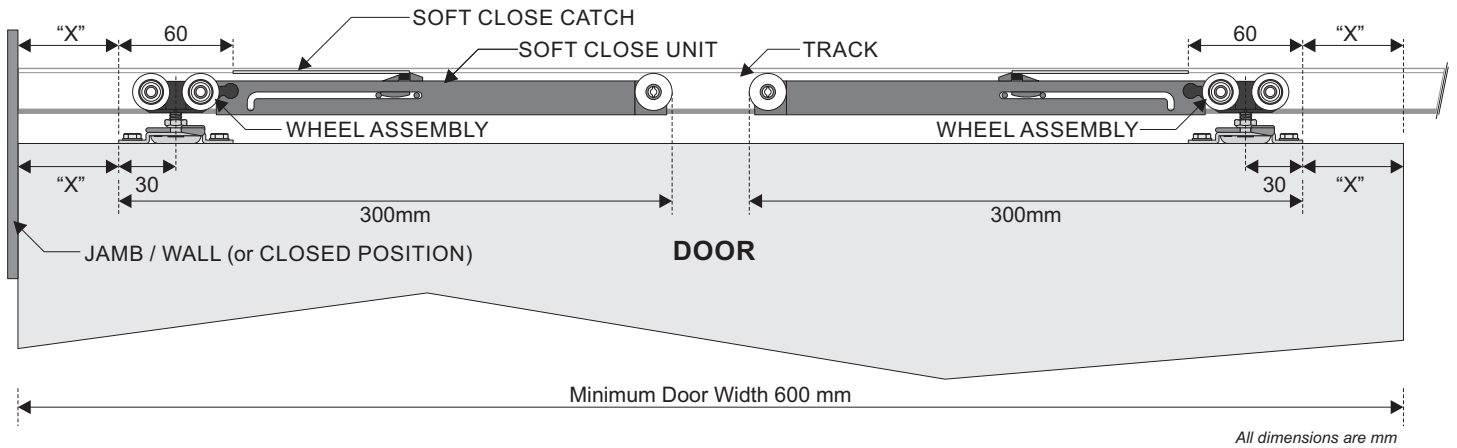


PACK CONTENTS

Item Description	Qty
Soft Close Unit	1
Soft Close Retaining Screw (a) M2 x 4mm	1
Soft Close Catch	1
Catch Screw (b) 4 x 1/2" CSK (for top fix tracks)	4
Catch Screw (c) M4 x 10mm with Nut M4 Nyloc (for wall fix tracks)	4

EXISTING PARTS - COWDROY TRIUMPH SLIDING DOOR SYSTEM




Wheel Assembly
with attachment arm

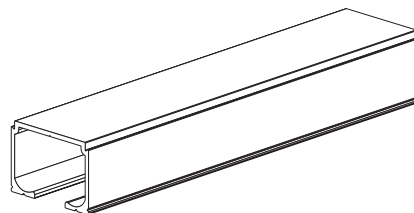

Triumph Track
(top fix)

or

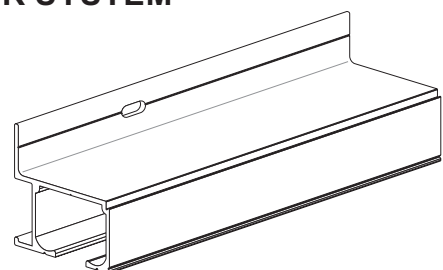

Triumph Track
(wall fix)